

**REFRIGERATOR MANUFACTURER**  
**Turbo air**  
 more durable, efficient, beautiful

4184 E. Conant St.  
 Long Beach, CA 90808  
 Tel. 310-900-1000  
 Fax. 310-900-1077  
[www.turboairinc.com](http://www.turboairinc.com)

Project :

Model # :

Item # :

Qty :

Available W/H :

Approval :


## Sushi Cases

Display Cases  
 Refrigerated Sushi Cases

**Model : SAK-60L-N**  
**SAK-60R-N**



**SAKURA-60L-N**



Unique and Stylish  
 304 Stainless Steel Material

### FEATURES & BENEFITS

- **Hydrocarbon refrigerants (R-290)**  
 With innovative and eco-friendly technology, Turbo Air brings you hydrocarbon refrigerators designed to meet DOE's Energy Conservation Standards in 2017 and to use EPA's SNAP Program approved HC refrigerants. Hydrocarbon refrigerants do not deplete the ozone layer and have very low contribution to global warming (ODP-0, GWP-3).
- **Ambient temperature range 50°F ~ 80°F, saturation temperature 39°F**
- **Beautifully curved, angled down top front glass**
- **1" diameter drain hole with plastic cover**
- **Slightly inclined bottom for better drainage**
- **Larger interior for optimized display effect**
- **Stainless steel solid food plates**
- **Low-E coated, tempered glass doors with durable plastic door handles at chef side**
- **Exterior body is beautifully made from unique and stylish stainless steel material**
- **Side mount compressor makes it easy to be serviced without being moved**
- **Elegant contemporary Euro design enhances any store application**
- **Easy cleaning and excellent durability**
- **Condenser located on left or right from the front view**
- **Drain hole located on left from the chef side**
- **Refrigerator maintains 35°F ~ 41°F for the best in food preservation**



| Model                  | Compressor Location | Sliding Door | CU./FT. | Bottom Shelves | HP  | AMPS | Crated Weight (lbs.) | L x D* x H (inches)      |
|------------------------|---------------------|--------------|---------|----------------|-----|------|----------------------|--------------------------|
| SAK-60L-N<br>SAK-60R-N | Left<br>Right       | 4            | 1.7     | 5              | 1/6 | 4.6  | 102                  | 59 3/4 x 14 1/8 x 11 1/2 |

## Model : SAK-60L-N / SAK-60R-N

| ELECTRICAL DATA           |                 |
|---------------------------|-----------------|
| Voltage                   | 115/60/1        |
| Plug Type                 | ⓘ NEMA 5-15P    |
| Full Load Amperes         | 4.6             |
| Compressor HP             | 1/6             |
| Cord Length (ft.)         | 9               |
| Refrigerant               | R-290           |
| DIMENSIONAL DATA          |                 |
| Net Capacity (cu. ft.)    | 1.7             |
| Ext. Length Overall (in.) | 59 3/4 (1518mm) |
| Ext. Depth Overall (in.)* | 14 1/8 (360mm)  |
| Ext. Height Overall (in.) | 11 1/2 (292mm)  |
| Int. Length Overall (in.) | 45 1/8 (1145mm) |
| Int. Depth Overall (in.)  | 12 (305mm)      |
| Int. Height Overall (in.) | 6 1/2 (165mm)   |
| # of Sliding Doors        | 4               |
| # of Bottom Shelves       | 5               |
| Shelf Size (in.)          | 11 x 9          |
| Net Weight (lbs.)         | 87              |
| Gross Weight (lbs.)       | 102             |
| Power Cord Length (in.)   | 59 1/8          |

Design and specifications subject to change without notice.

Actual shipping weight may differ due to extra packing materials for product protection.

\* Depth does not include 5/8" for drain.

- **WARRANTY :** 2 Year Parts and Labor Warranty  
Additional 3 Year Warranty on Compressor


### ■ STANDARD FEATURES

- Anti-corrosion coated evaporator
- Self-contained system
- No plumbing required
- Simple plug-in installation
- Recommended operating conditions


SAK models are designed to operate in environments where temperature & humidity do not exceed 75°F and 55% relative humidity.

## PLAN VIEW

(unit : inch)

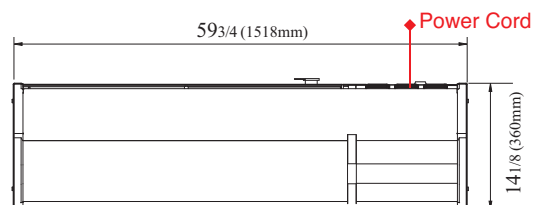


SAK-60R-N

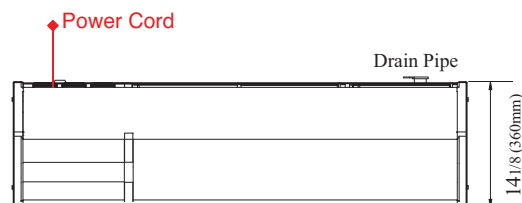


SAK-60L-N

### TOP VIEW

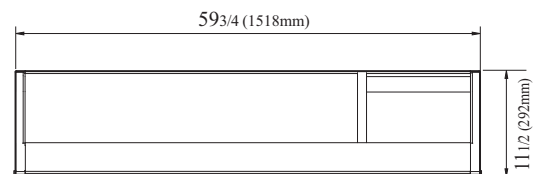


SAK-60R-N



SAK-60L-N

### FRONT VIEW



SIDE VIEW

Ver.20181219



- Turbo Air : 800-627-0032
- GK : 800-500-3519
- Warranty : 800-381-7770
- AC : 888-900-1002