



• Undercounter dishwasher;

- Stainless steel construction 18/10 AISI 304;
- Wash cycle time: 2 minutes;
- Wash and rinse temperature thermometers;
- Stainless steel lower and upper rotating wash arms;
- Stainless steel lower rotating rinsing and upper fixed;
- Extractable control panel for an easy maintenance;
- Rinse aid dispenser;
- Detergent pump;
- Automatic tank loading;
- Door opening safety device;
- Thermocontrol: device which guarantees the selected temperature for every rinsing cycle even in case of non-stop work;
- Security thermostat;

• Certifications: UL, UL Sanitation;



SIZE:
23 3/4" W x 25" D x 32 1/4" H

Cycle period: 2 minutes

Capacity per hour:
Baskets/H 30



DSP4

Accessories:

- 1 basket for dishes;
- 1 generic basket;
- 1 cutlery container;

OPTIONS,

- Stainless steel base H17,72 inch,

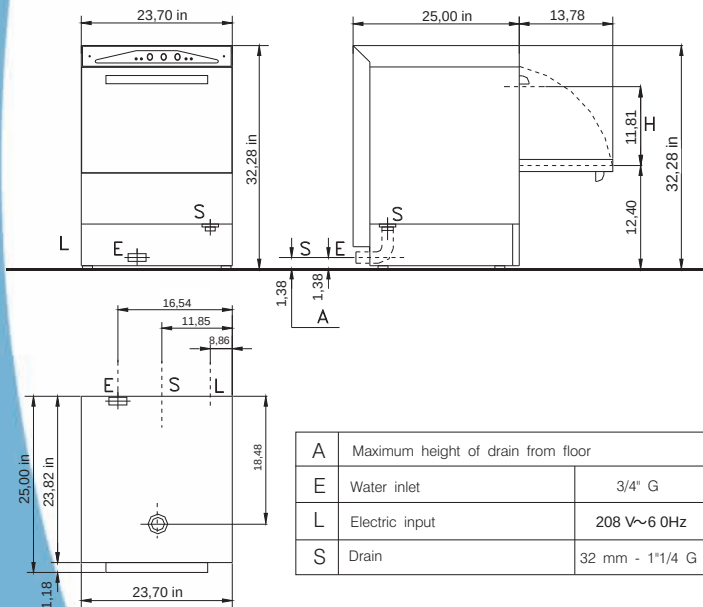

Specifications	DSP4	
VOLTAGE	208 V1ph 60Hz	V
WASHING PUMP	650	W
WASH TANK ELEMENTS	2000	W
RINSE TANK ELEMENTS	3000	W
TOTAL RATING	3650	W
MAX CURRENT INTENSITY	20	A
PLATES CLEARANCE	11,81	inch
WORK HEIGHT	12,40	inch
TANK CAPACITY	4	Gal.
BOILER CAPACITY	0,8	Gal.
PUMP DELIVERY	260	Lt/min
WATER CONNECTION	131	°F
WATER CONSUMPTION PER CYCLE	0,6	Gal.
WATER CONSUMPTION PER HOUR	19	Gal.
WATER PRESSURE	20±5	psi
WATER HARDNESS	5 ÷ 10	TH(°F)
RINSING WATER TEMPERATURE	179 ÷ 194	°F
WATER INLET	3/4"	"G
WATER OUTLET	1"1/4	"G
NET WEIGHT	95	Lbs
GROSS WEIGHT	106	Lbs
PACKING SIZE	/ 24,80xL28,37xH44,09	inch
NOISE LEVEL	<70	dB(A)

The manufacturer reserves the right to make modifications of materials and models without warning.



Eurodib, 120 de la Barre, Boucherville, Qc, Canada, J4B 2X7
OR Po Box 1798, 1320 Route 9, Champlain, NY, USA, 12919
tel: 1-888-956-6866 Fax: 1-877-956-6867
www.eurodib.com e-mail: shaun@eurodib.com

Z.I. Via Italia, 6 - 26855 Lodivecchio (LO) Italy
Tel. (0371) 753202 - 754248-9 Fax (0371) 752928
www.lamber.com - e-mail: info@lamber.it

COMPANY
WITH QUALITY SYSTEM
CERTIFIED BY DNV
= ISO 9001/2000 =