

PROJECT :	
MODEL # :	
ITEM # :	QTY :
AVAILABLE W/H :	
APPROVAL :	

# Glass Door Merchandiser Refrigerator

**K-SERIES**



**BKGM23**

**BKGM49**

**BKGM72**

## STANDARD FEATURES

**BOTTOM MOUNT COMPRESSOR**

*THE BOTTOM MOUNT COMPRESSOR PROVIDES QUICK AND EASY MAINTENANCE*

WHITE COATED STEEL EXTERIOR AND ALUMINUM INTERIOR

EVAPORATOR FAN STOPS AUTOMATICALLY WHEN DOOR IS OPEN

SELF-CLOSING DOOR

TEMPERED DOUBLE PANE GLASS DOORS WITH HEAT REFLECTION FILM

CFC FREE HIGH DENSITY CELL POLYURETHANE INSULATION

**DIGITAL TOTAL MONITORING SYSTEM**

*OFFERS EASY TEMPERATURE ADJUSTMENT AND A SIMPLE TO CONTROL DEFROST CYCLE*

INTERIOR LED LIGHT AND LED LIT AD PANEL

2" DIAMETER SWIVEL CASTERS AND 2 LEVELING LEGS

STANDARD DOOR LOCKS

DURABLE DOOR GASKET WITH EASY REPLACEMENT

4 SHELVES PER EACH DOOR SECTION WITH 1" ADJUSTABLE SHELVING




**WARRANTY**  
2 Years Parts and Labor  
5 Years on Compressor in USA

APPROVALS:

AVAILABLE AT:

# Glass Door Merchandiser Refrigerator

## Product plan View

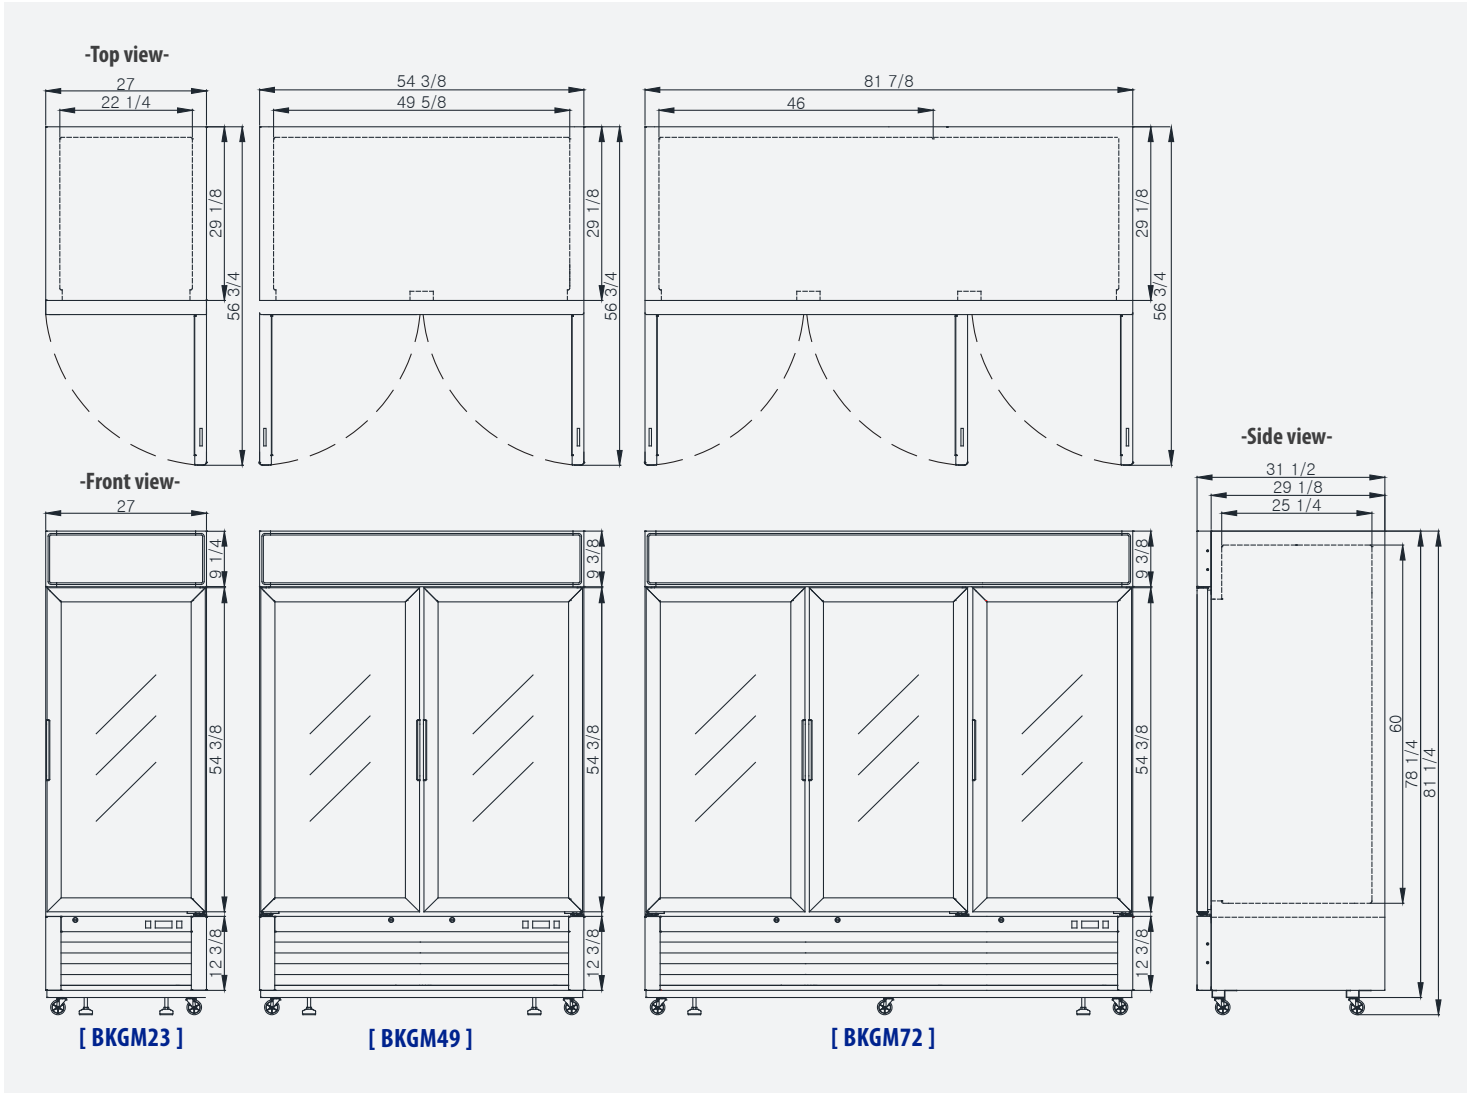

## Product Specification

### Glass Door Merchandiser Refrigerator

Model	Product Description						Refrigerant			Temperature Range	
	Glass Door Merchandiser Refrigerator						R-134a			33 ~ 38 °F	
	Easy Maintenance				Voltage		NEMA Config.			Cord Length (ft/m)	
	Sliding Condensing Unit				115V/60Hz		NEMA5-15			9.8ft (3m)	
	Doors	Capacity (Cu. Ft.)	Shelves	Cabinet Dimensions (inches / mm)			Foot	HP	Amps	Net Weight (lbs/kg)	Ship Weight (lbs/kg)
				L	D	H					
BKGM23	1 Swing Door	23	4	27"(685mm)	31 1/2" (800mm)	81 1/4" (2065mm)	4 Casters	1/5	3.2	254 (115)	280 (127)
BKGM49	2 Swing Doors	49	8	54 3/8"(1382mm)	31 1/2" (800mm)	81 1/4" (2065mm)	4 Casters	1/4	4.3	408 (185)	435 (197)
BKGM72	3 Swing Doors	72	12	81 7/8" (2079mm)	31 1/2" (800mm)	81 1/4" (2065mm)	6 Casters	3/4	7.3	559 (254)	585 (265)

\* BLUE AIR has the right to change specifications without further notice.